"service, strength and quality"

Thistlelift MFB16 Landing Crane, Continuous Rotation

THISTLE GROUP



The MFB16 landing and discharge crane is typically used for loading and unloading fish boxes and equipment between vessel and quayside. Designed for harsh environment use and manufactured from seawater resistant materials throughout, it has a small footprint and its reach can be tailored to suit your requirement. Available with or without continuous rotation function. We have also supplied these cranes for permanent install on the quayside for loading and unloading catches and equipment from boats. Our service offers complete installation on your vessel and training where required. All our cranes are provided with a 1 year warranty.

THISTLELIFT



SWL 2,000kg @ 8M

Technical Data Load Rating: 16,000 kg / metre Style: Straight main boom, 1 dynamic section, continuous rotational base Lift: 2,000 kg @ 8 metre reach Hydraulic Supply: Typically 210 bar at 45 LPM Hydraulic Control: Manual control valves Slew Range: Continuous rotation **Overall Weight:** 2,550 kg





- Remote control
- HPU
- Custom colours


Key Points:

- Spare parts always in stock
- Responsive service and repair
- Available in larger capacities and reaches

 $\ensuremath{\mathbb{C}}$ Thistle Group Limited 2018, information correct at time of publish

Y

THISTLE GROUP HQ 5 Baltic Place, Peterhead, Aberdeenshire, Scotland, AB42 1TF Tel: +44 (0)1779 477 210 sales@thistlemarine.co.uk www.thistlegroup.co.uk

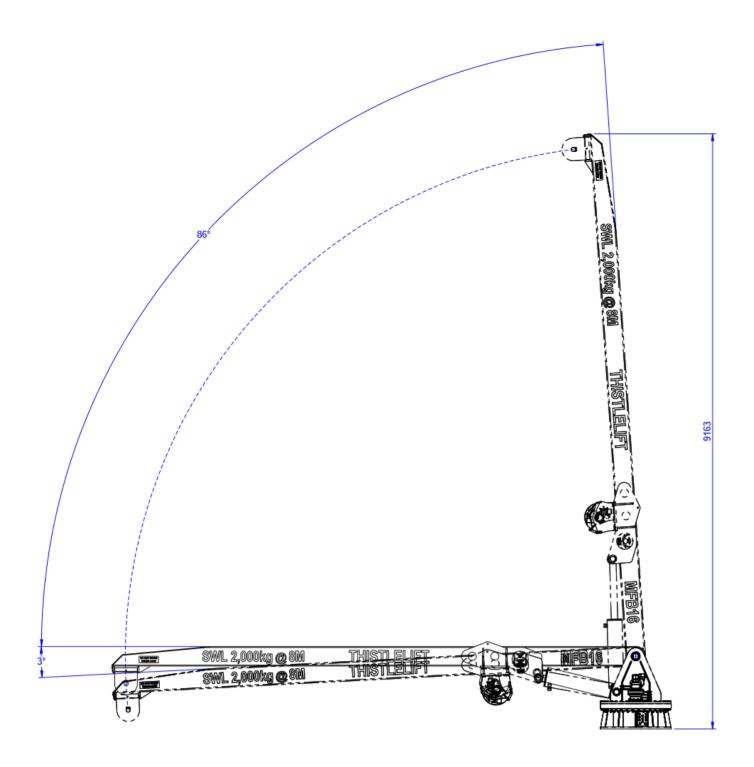

Dimensional drawing available upon request

Thistlelift MFB16 Landing Crane, Continuous Rotation



THISTLE GROUP

"service, strength and quality"

Document Number: TM-DS-036-Rev 1

Page 2 of 2